


Factory Installed Pickup Loop 25 In. x 54-5/8 In. Connects Steel Wheel Riser Units

MODEL SWR-CPL-SM

Loading Dock Equipment / Steel Wheel Risers

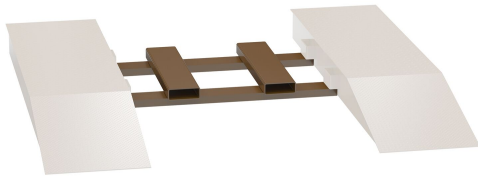

PRODUCT OVERVIEW

This central pick-up loop connects two (2) wheel risers allowing a fork truck to easily position and move risers as one.

KEY FEATURES

- Factory installed
- Raised diamond tread plate surface provides a non-slip grip
- Brown liquid paint finish
- Built in compliance with OSHA/ANSI B56.1 part 3 sec 38

CORE PRODUCT DATA

ASSEMBLED WEIGHT
54 lbs

ASSEMBLED SIZE
54.625" W x 25" L x 5.4375" H

SHIP WEIGHT
55 lbs

PACKAGE 1 SIZE
102" W x 8" D x 3" H

COLOR / FINISH
Brown

FREIGHT TYPE
LTL Palletized

AVAILABILITY Available

QUICKSHIP: --

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

PRODUCT SPECIFICATIONS

Overall Width (in.)	54-5/8
Width Between Risers When Installed (in.)	53-1/8
Overall Height (in.)	5-7/16
Height from Ground to Top of Side Loops When Installed	5-11/16
Overall Depth (in.)	25
Fork Pocket Width (in.)	7-1/2
Fork Pocket Height (in.)	2-1/2

PRODUCT & SHIPPING REFERENCE

Shipping Point: Angola, IN 46703

Warranty: 30 Days

AVAILABLE PRODUCT RESOURCES



SCAN FOR CURRENT PRODUCT DATA